


12" STRIP OF POLYGUARD 650 MEMBRANE
PLACED ASPHALT SIDE UP TO RECIEVE
BACKING OF THE UNDERSLAB - EXTEND
IT A MINIMUM OF 4" PAST END OF
UNDERSLAB - ROLL WITH ROLLER

UNDERSLAB MEMBRANE
APPLIED AND OVERLAPPED
OVER THE 4" EXPOSED ASPHALT
EDGE

FABRIC TAPE REQUIRED OVER PRIMED
UNDERSLAB SEAM FULL LENGTH
(NOT SHOWN ALL THE WAY
FOR CLARITY)

4" EXPOSED ASPHALT
OVERLAP ON SIDE SEAM

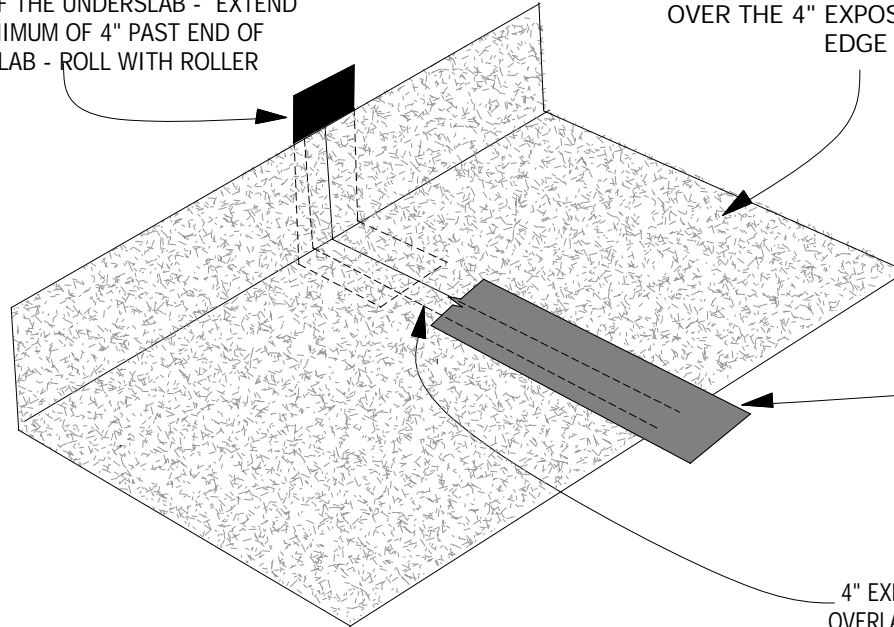

US19

SECTION @ HORIZONTAL TO VERTICAL UNDERSLAB SEAMS

© POLYGUARD PRODUCTS, INC. 2011

(NOT TO SCALE)

Polyguard Products, Inc.

P.O. Box 755 - Ennis, TX 75119

Phone: 214-515-5000 Fax: 972-875-9425

Web Site - www.polyguardproducts.com

x:\u\sl\nd\underslab\2007\underslab\US19horizontaltoverticalseamdetail

Polyguard

The information provided is based on data and knowledge considered to be true and accurate and is offered for the users' consideration, investigation and verification, but we do not warrant the results to be obtained. Please read all data sheets, statements, recommendations or suggestions in conjunction with our conditions of sale, which apply to all goods supplied by us.