


12" PIECE OF FABRIC TAPE APPLIED OVER UNDERSLAB MEMBRANE PRIMED WITH 650 LT LIQUID ADHESIVE OR CALIFORNIA SEALANT

POLYGUARD UNDERSLAB MEMBRANE EMBEDDED IN WET LM-95

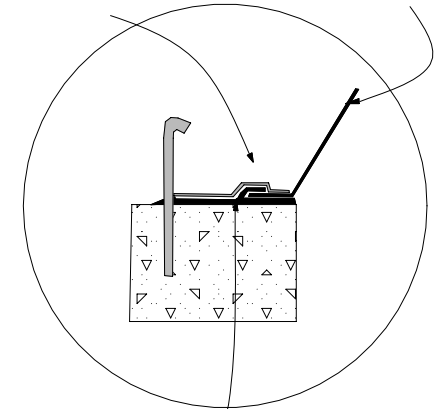

LM-95 LIQUID MEMBRANE APPLIED 90 MILS MINIMUM AND APPLIED OVER THE TOP OF THE UNDERSLAB MEMBRANE PREPARED WITH 650 LT LIQUID ADHESIVE OR CALIFORNIA SEALANT

US4

**SECTION @ GRADE BEAM PILE CAP (OPTION 2)**

© POLYGUARD PRODUCTS, INC. 2008  
(NOT TO SCALE)

Polyguard Products, Inc.  
P.O. Box 755 - Ennis, TX 75119  
Phone: 214-515-5000 Fax: 972-875-9425  
Web Site - [www.polyguardproducts.com](http://www.polyguardproducts.com)  
x:\u\sl\nd\underslab\2007\underslab\USA



The information provided is based on data and knowledge considered to be true and accurate and is offered for the users' consideration, investigation and verification, but we do not warrant the results to be obtained. Please read all data sheets, statements, recommendations or suggestions in conjunction with our conditions of sale, which apply to all goods supplied by us.