


MECHANICALLY FASTEN
12" OC ON ENDLAP
AND 24" OC ON SIDE LAP
ALL EXPOSED FASTENERS
MUST BE SEALED WITH
POLYGUARD LM-95

RELEASE SHEET
REMOVED AFTER
INSTALLATION AND
BEFORE POURING
OF CONCRETE

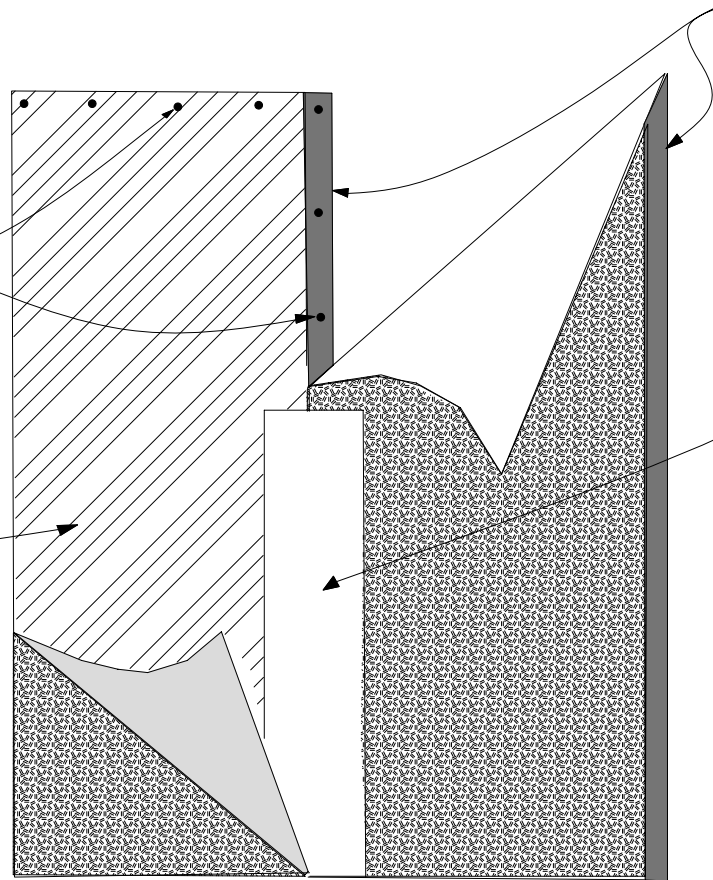

FACTORY SEAM WITH 4"
RUBBERIZED ASPHALT COMPOUND.

SELF ADHERING LAPS ARE
FORMED WITH EACH
SHEET OVERLAP

12" FABRIC TAPE
APPLIED OVER 4" FACTORY
LAP AND 650 LT LIQUID ADHESIVE

**FOR COLD TEMPERATURE
APPLICATIONS - PLEASE CONTACT
YOUR LOCAL POLYGUARD REP
FOR ADDITIONAL DETAILS/
INSTRUCTIONS.**

BS19

SECTION @ MEMBRANE SIDE LAPS/FACTORY SEAM - REINFORCED

© POLYGUARD PRODUCTS, INC. 2010
(NOT TO SCALE)

Polyguard Products, Inc.
P.O. Box 755 - Ennis, TX 75119
Phone: 214-515-5000 Fax: 972-875-9425
Web Site - www.polyguardproducts.com
xlu/s/n/d/underseal/2007/blindside/BS19

Polyguard

The information provided is based on data and knowledge considered to be true and accurate and is offered for the users' consideration, investigation and verification, but we do not warrant the results to be obtained. Please read all data sheets, statements, recommendations or suggestions in conjunction with our conditions of sale, which apply to all goods supplied by us.