


- 6) EXTERIOR CONCRETE SLAB
- 5) STEEL REBAR DOWEL TYING NEW SLAB TO EXISTING SLAB OR FOUNDATION WALL, EXTENDING 2" INTO EXISTING CONCRETE AND 4" INTO NEW SLAB, INSTALLED 2" FROM TOP OF SLAB. PLACE DOWELS EVERY TWO FEET ALONG NEW SLAB
- 4) POLYGUARD TERM PARTICLE TERMITE BARRIER INSTALLED AGAINST CLEAN EXISTING CONCRETE AND ON TOP OF ROOT BARRIER JUST PRIOR TO CONCRETE SLAB POUR
- 3) POLYGUARD ROOT BARRIER COVERING SOIL SURFACE BUT NOT CONCRETE SURFACE
- 2) DIG WEDGE-SHAPED TRENCH 6" DEEP AND 5" WIDE
- 1) EXISTING CONCRETE SLAB OR FOUNDATION

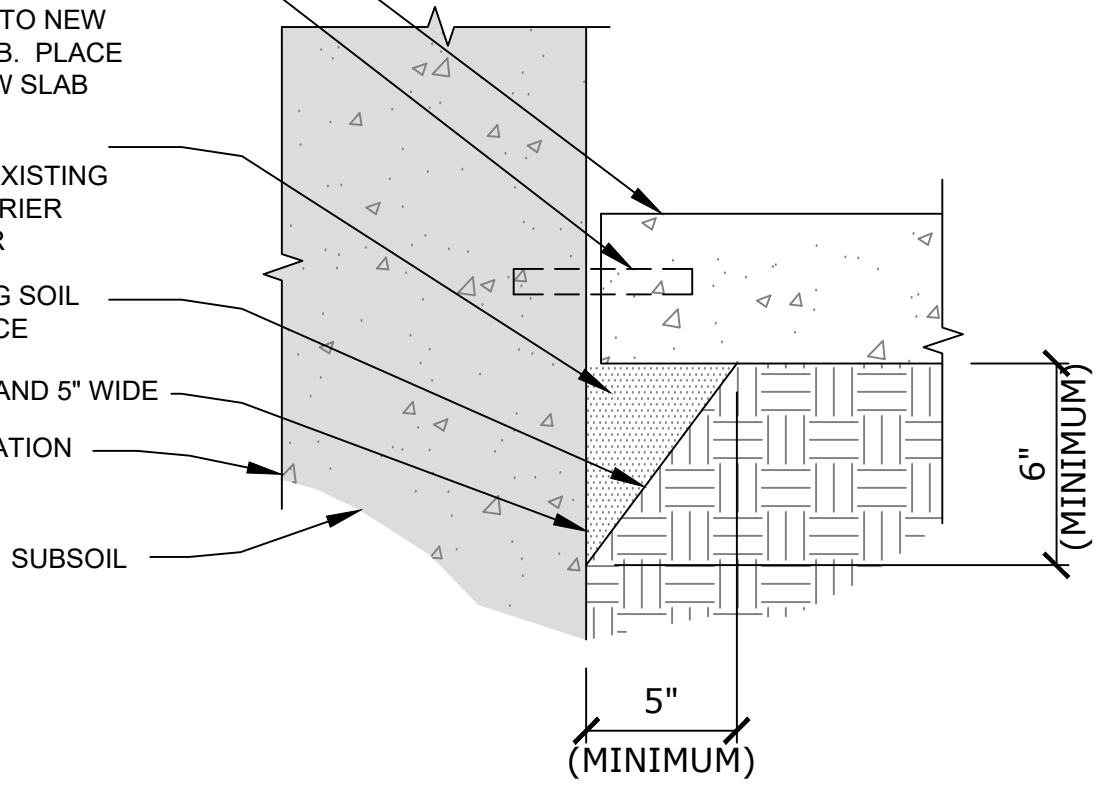

SECTION @ TERM[®] PARTICLE BARRIER UNDER CONCRETE SLAB (DRIVEWAY, PATIO, OR SLAB) ADJACENT TO EXISTING CONCRETE STRUCTURE

(BASED ON US ARMY CORPS OF ENGINEERS PACIFIC ISLAND INSTALLATION TERMITE BARRIER DETAIL)

©POLYGUARD PRODUCTS, INC.

TPC6

Polyguard
 Innovation based. Employee owned. Expect more.
 P.O. Box 755 - Ennis, TX 75120
 Phone: 214-515-5000 Fax: 972-875-9425
 Web Site - www.polyguardbarriers.com



<p>The information provided is based on data and knowledge considered to be true and accurate and is offered for the users' consideration, investigation, and verification; but we do not warrant the results to be achieved. Please read all data sheets, statements, suggestions, or recommendations in conjunction with our conditions of sale, which apply to all goods supplied by us.</p>	DRAWING SCALE:
	NOT TO SCALE
	EFFECTIVE DATE:
	05/25/2021
	SUPERCEDES:
	NONE