


ZERO-PERM® VAPOR BARRIER MEMBRANE

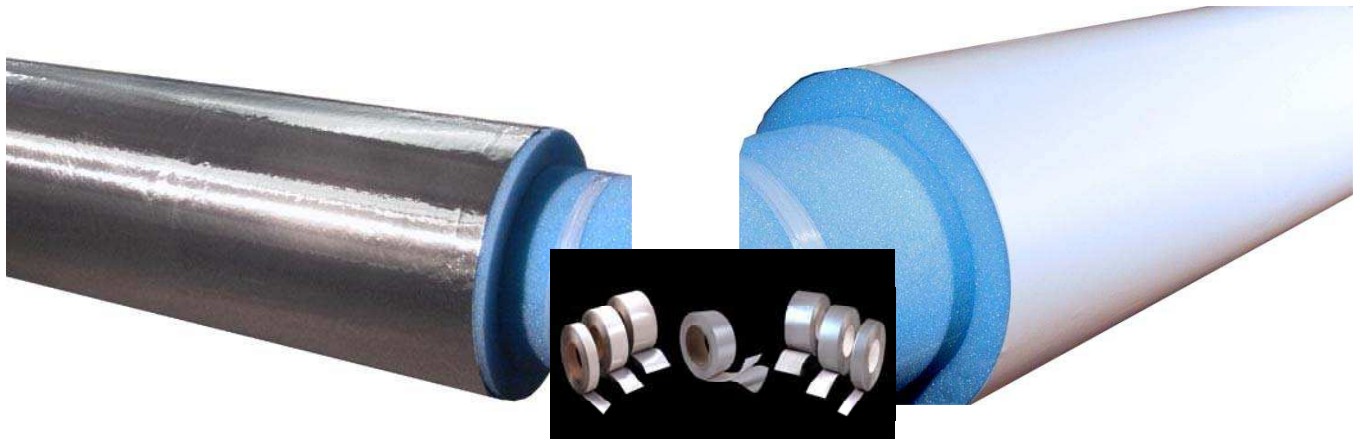

Zero-Perm® vapor barrier membrane from **Polyguard Products** is an absolute “zero perm” barrier that provides maximum protection for all types of insulations used in below ambient, sub-freezing and cryogenic applications on duct, pipe, or vessel systems.

- Bright white finish similar to traditional ASJ, new WMP-ASJ and PVDC jacketing
- Meets ASTM E84 25/50 Smoke and Flame requirements.
- Meets ASTM 1136-12, Type IX
- Puncture and tear resistant
- Zero permeability
- Paper-free
- Mold resistant

Description

Zero-Perm® is a 3-ply composite membrane consisting of a white 0.5 mil polyester film, 1.0 mil aluminum foil, and one 0.5 mil clear polyester film. The foil provides the zero permeance in the composite while the polyester layers protect the foil and provide the white finish, toughness and tear resistance. ZeroPerm is reversible, the white polyester side of can be left exposed when no protective jacket is required and offers an appearance similar to traditional and next generation ASJ, PVC and PVDC polymer jacketing. The polyester side presents a smooth silver foil finish.

Uses

Zero-Perm® vapor barrier is used on cold systems either between layers of insulation on sub-freezing projects like LNG piping, or as the outer vapor-barrier jacket on ammonia, brine or glycol systems under mechanical jacketing, either metal or PVC. **Zero-Perm** can also be used on chilled water systems replacing ASJ and PVDC jacketing either left exposed or under a protective metal or PVC jacket.

Installation

Zero-Perm® is typically factory installed by a fabricator but can be installed in the field. Two types of **Zero-Perm** tapes are available to complete the installation in the field. Both use a high quality, acrylic adhesive with excellent cold weather performance. **Zero-Perm A** has a kraft release liner and is typically available in 2” and 3” width rolls for sealing longitudinal and circumferential laps. Zero-Perm Self-Wound has no liner, is used on valves and fittings and comes in 1”, 2” and 3” widths. See separate data sheet for Zero-Perm tapes.

Packaging

- **Zero-Perm Vapor Barrier** (rolls) - 23.5” x 500’; 35.5” x 500’; 35.5” x 1000’
- **Zero-Perm Vapor Barrier** (rolls) - 23.5” x 500’; 35.5” x 500’; 35.5” x 1000’
- **Zero-Perm A** (acrylic adhesive with liner) (rolls)- 2”, 3”, 23.5”, 35.5” x 150’
- **Zero-Perm Self-wound Tape** (acrylic adhesive) (rolls)- 1”, 2”, 3” x 400’

Zero-Perm® Technical Properties and Testing

Membrane Property	Test Method	Results
Total Product Thickness	Micrometer	2.0 Mils(12.2/25/12.2)Film Only 2.4 Mils(Total)
Water Vapor Transmission(grains/hr-ft ²)	ASTM E96-Procedure A	.00
Burst Strength	ASTM D 774	100 psi
Tensile Strength	ASTM C1136	27 lb/in(XD) 23 lb/in(MD)
Elongation	ASTM-882-02	55% (MD) 50% (XD)
Mold and Mildew Resistance	ASTM C-1338	No Growth
High Service Temperature Limit	4 Hour Oven exposure	+ 240°F
Low Service Temperature Limit	ASTM D1790	-40°F
Humidity Resistance	ASTM C1258	Pass
Dimensional Stability	ASTM D1204@150°F	< 0.25% change
Weight Per Area	Scale/Balance	22.7 lbs/ 1000 sq.ft.
Flame/Smoke	ASTM E-84	Meets 25/50

Note: Before installing Zero-Perm obtain a full set of installation instructions at www.PolyguardProducts.com or by calling Polyguard at 800-541-4994 or by asking your local distributor or sales representative.